# Upute za dodavanje poslužitelja u sys.backup uslugu

Windows Server 2012 i
Windows Server 2012 R2

Nakon pokretanja instalacijskog programa Bacule, pojavit će se početni prozor. Potrebno je odabrati „Next".
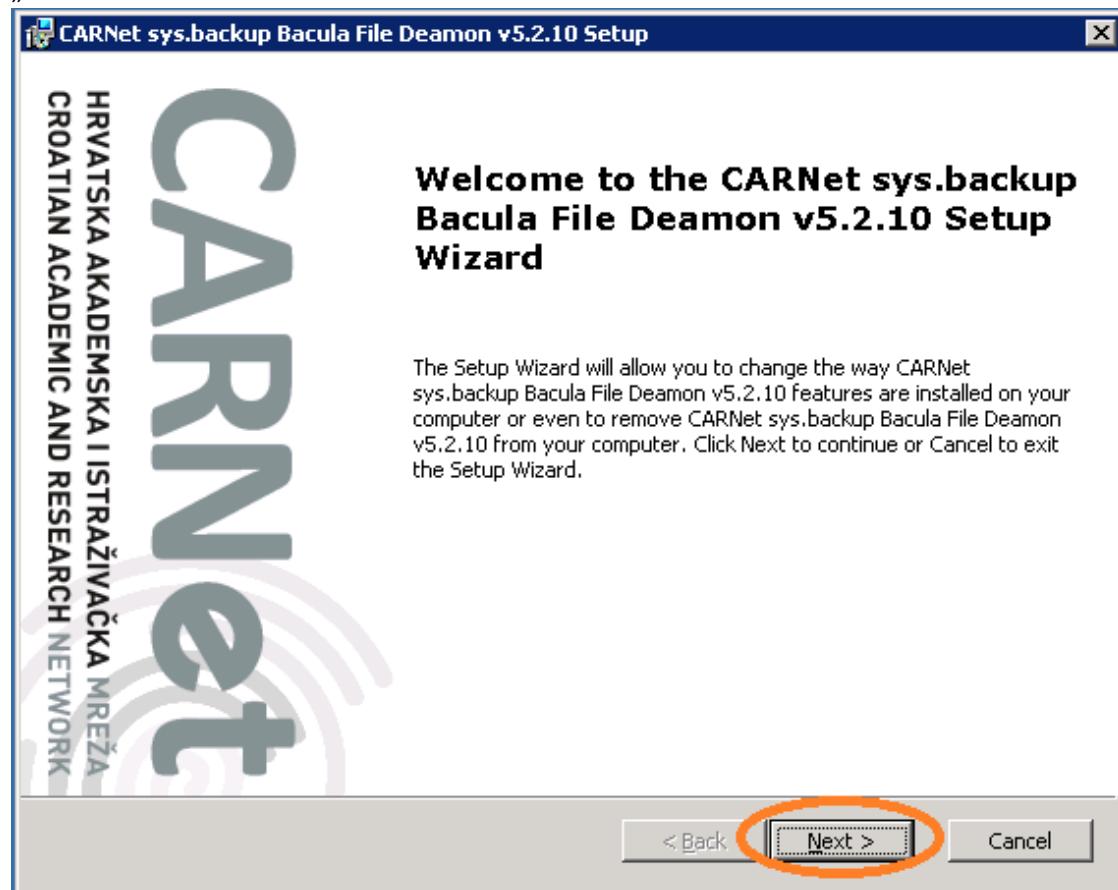
Na sljedećem prozoru potrebno je označiti „I accept the terms in the Licence Agreement" te odabrati opciju „Next".
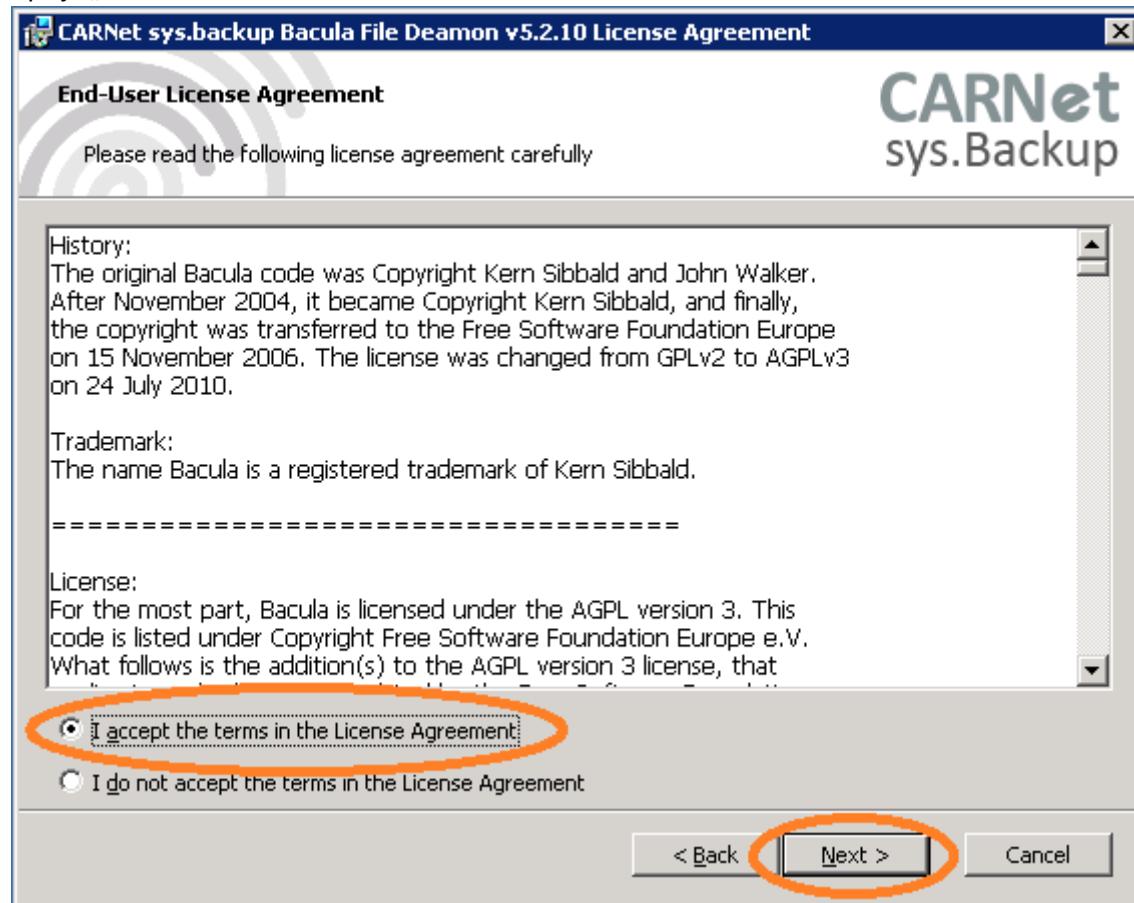
U ovom prozoru potrebno je unijeti podatke o kontakt osobi na ustanovi te FQDN poslužitelja koji
želite dodati u sys.backup uslugu. Polje „Password" automatski se popunjava te nije potrebno nista
upisivati. Za kraj, unesite IP adresu poslužitelja te odaberite „Next".
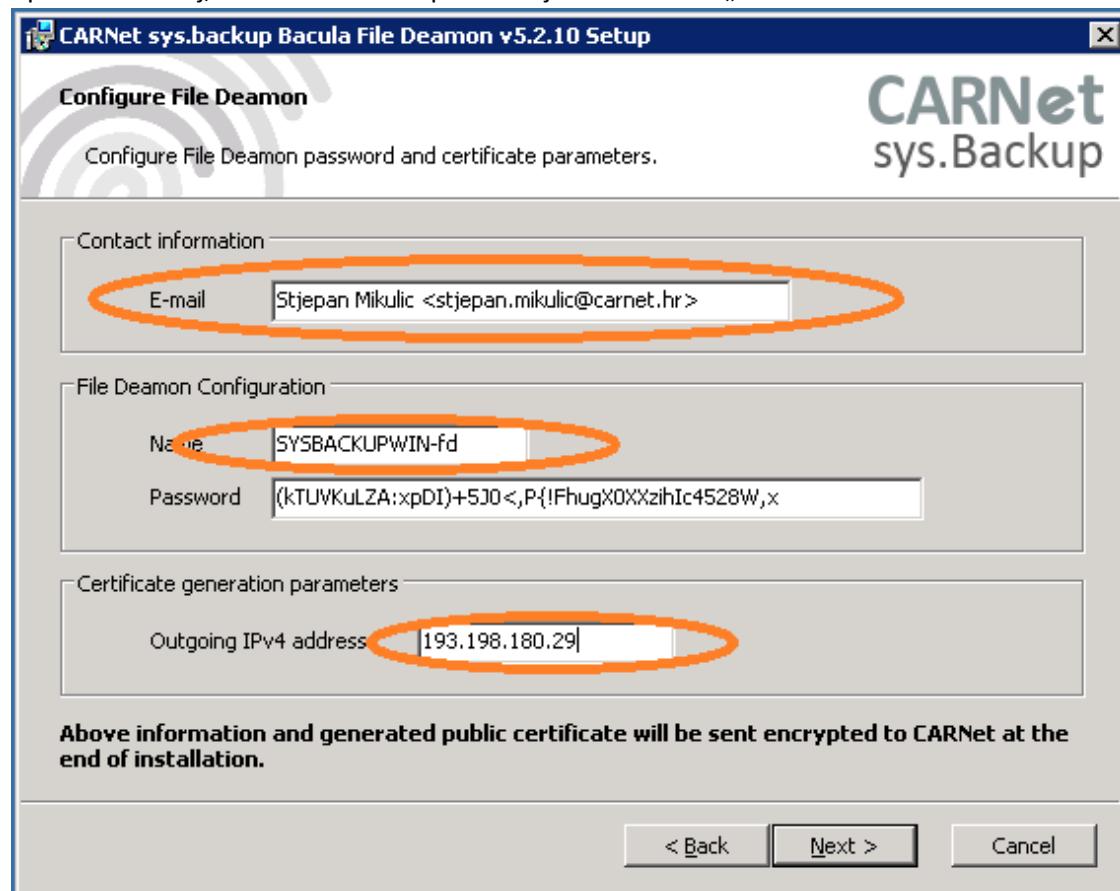
Nakon unosa podataka u prethodnom koraku, potrebno je odabrati „Install" kako bi instalirali Baculu
na poslužitelj.
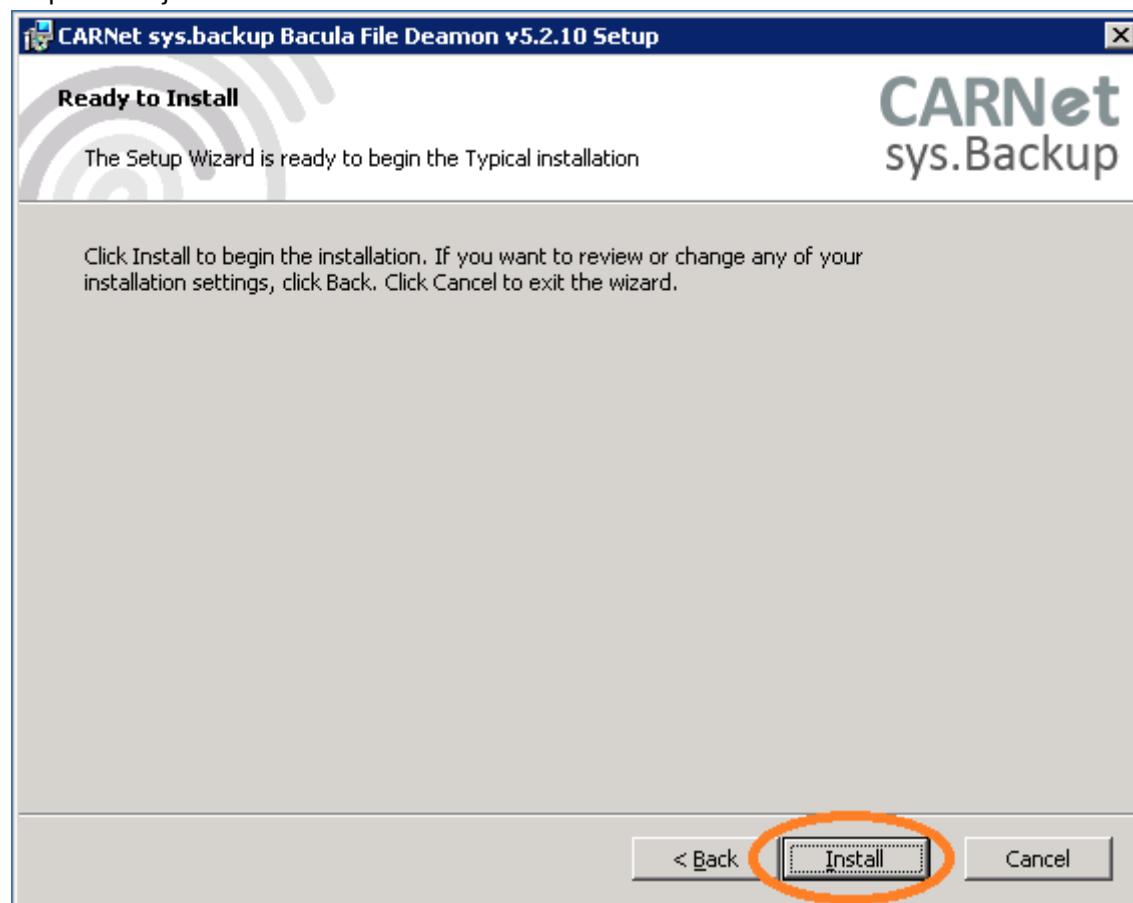
Normalan tijek instalacije izgledat će ovako:
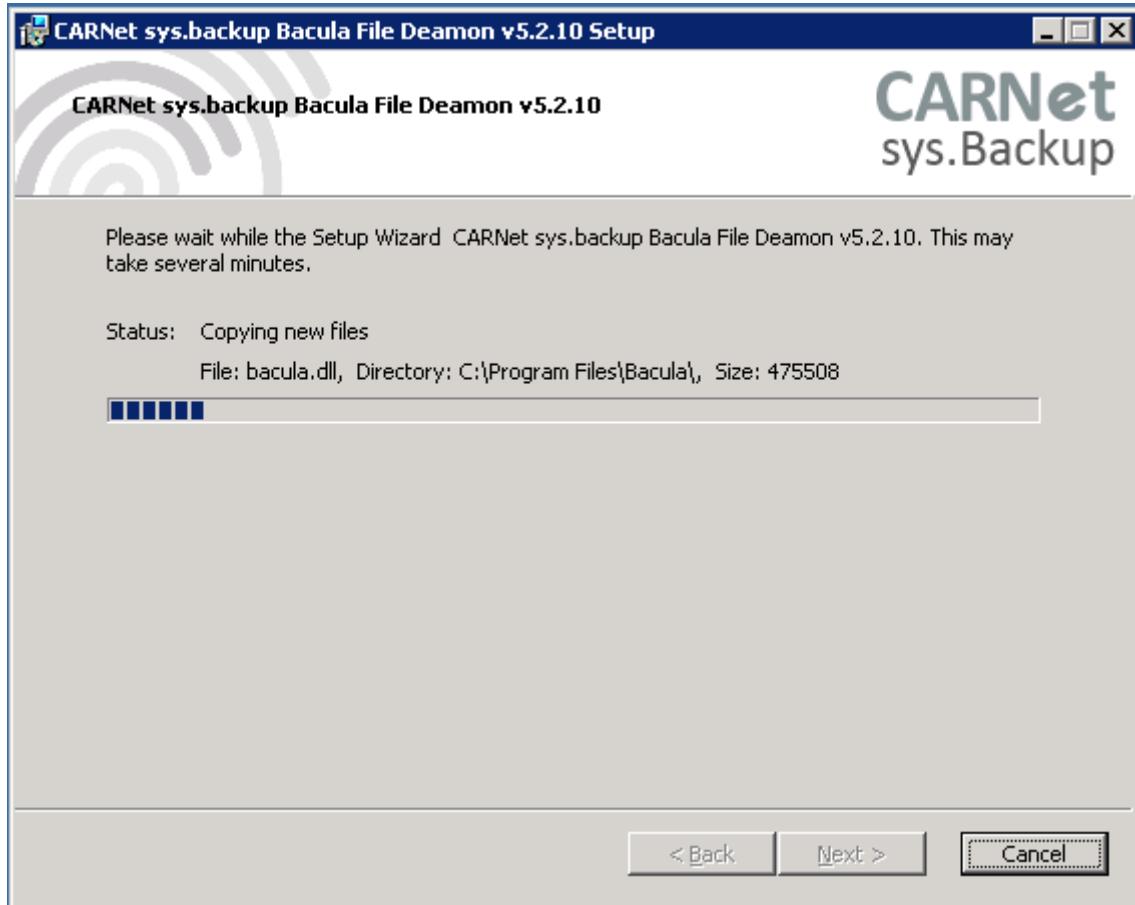
Po završetku instalacije Bacule, pojavit će se ovakav prozor. Odaberite „Finish". Time je instalacija Bacule završena, a podaci o poslužitelju poslani CARNet-u u kriptiranom obliku.
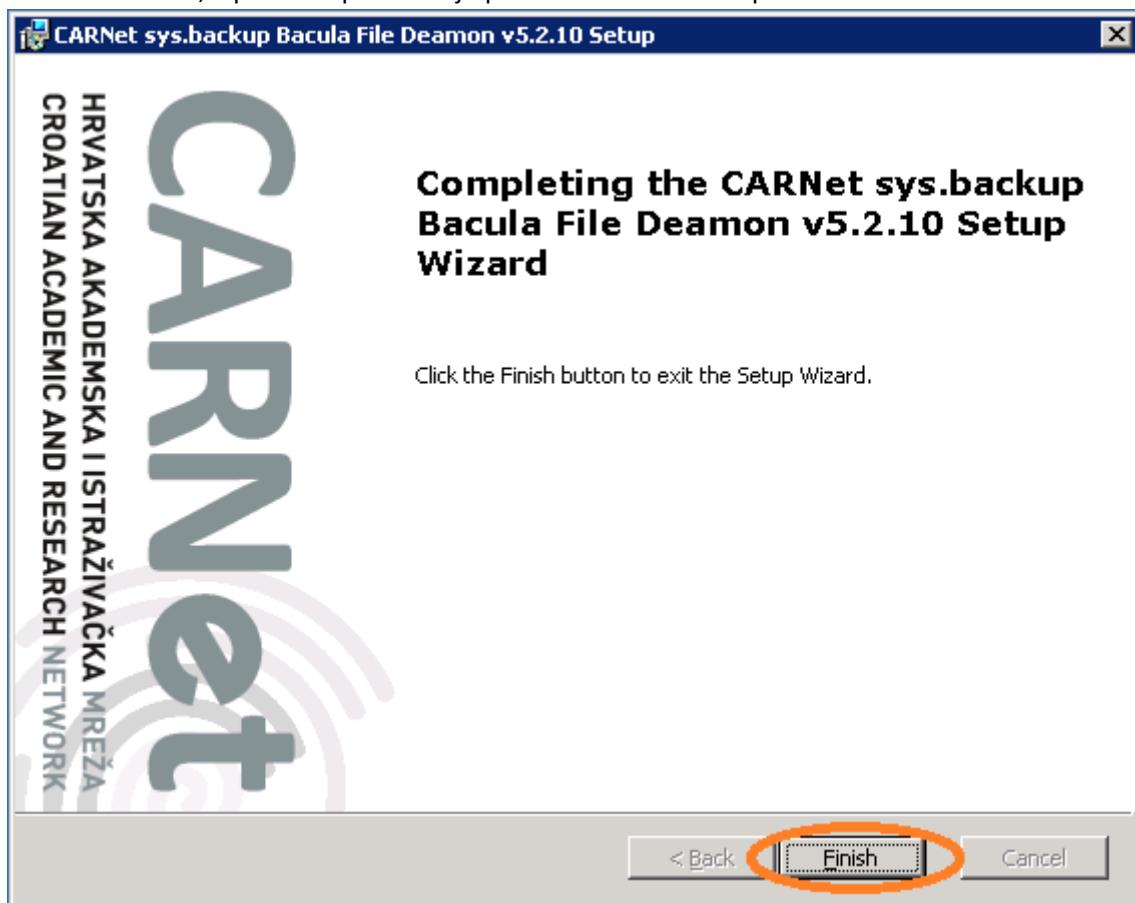
Windows Firewall rule se automatski kreira, tako da nije potrebno raditi dodatne korake, osim eventualne provjere postavki.

Za ulazak u Windows Firewall potrebno je pritisnuti Windows tipku na tipkovnici ili strelicom miša pozicionirati u donji lijevi kut kako bi se pojavila mogućnost otvaranja start menija.

Nakon otvaranja start menija, potrebno je upisati Windows Firewall te odabrati „Windows Firewall with Advanced Security" .
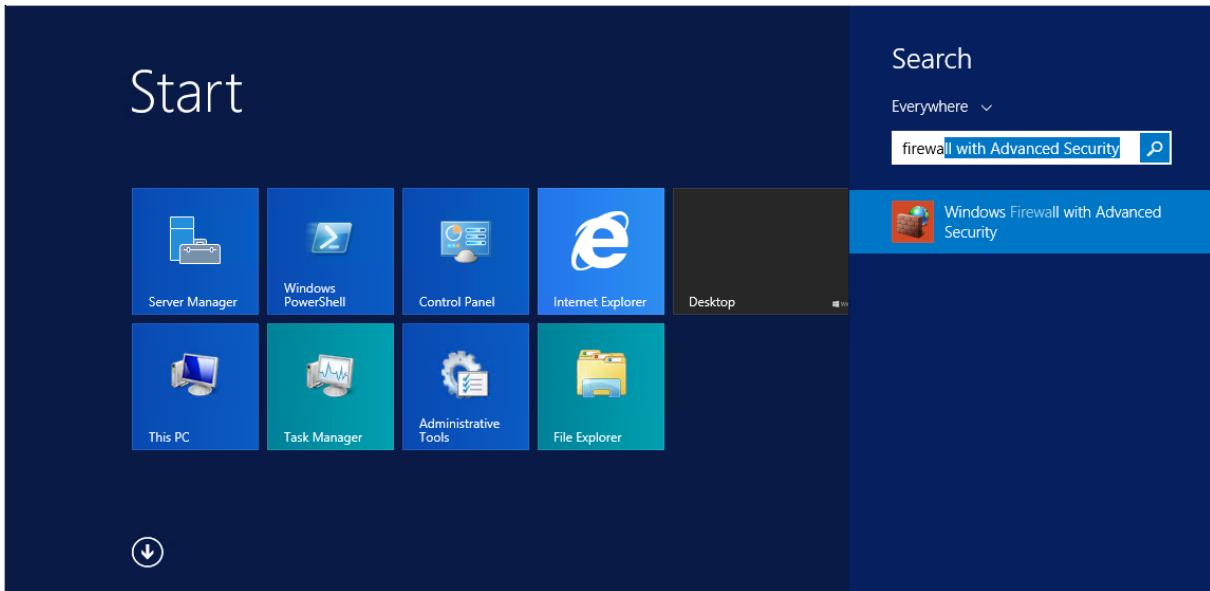
Nakon otvaranja Windows Firewall with Advanced Security, potrebno je pronaći Bacula File Deamon (TCP-In) rule, te dva puta kliknuti na isti.

Name	Group	▲	Profile	Enabled	Action	Override	Program	Local Address	Remote Address
Bacula File Deamon (TCP-In)			All	Yes	Allow	No	C:\Progr...	Any	193.198.192.34

Bacula File Deamon (TCP-In) Properties

Protocols and Ports | Scope | Advanced | Local Principals | Remote Users
General | Programs and Services | Remote Computers

General

Name:
Bacula File Deamon (TCP-In)

Description:

☑ Enabled

Action

◉ Allow the connection
○ Allow the connection if it is secure
  [Customize...]
○ Block the connection

[OK] [Cancel] [Apply]

Bacula File Deamon (TCP-In) Properties

General | Programs and Services | Remote Computers
Protocols and Ports | Scope | Advanced | Local Principals | Remote Users

Protocols and ports

Protocol type: TCP

Protocol number: 6

Local port: Specific Ports
9102
Example: 80, 443, 5000-5010

Remote port: All Ports
Example: 80, 443, 5000-5010

Internet Control Message Protocol (ICMP) settings: [Customize...]

[OK] [Cancel] [Apply]

Bacula File Deamon (TCP-In) Properties

General | Programs and Services | Remote Computers
Protocols and Ports | Scope | Advanced | Local Principals | Remote Users

Local IP address
◉ Any IP address
○ These IP addresses:
  [Add...]
  [Edit...]
  [Remove]

Remote IP address
○ Any IP address
◉ These IP addresses:
  193.198.192.34
  [Add...]
 [Edit...]
  [Remove]

[OK] [Cancel] [Apply]

Time je instalacija završena te je poslužitelj dodan u sys.backup. Nakon sljedećeg backup ciklusa primit ćete e-mail na adresu koju ste unijeli u jednom od prethodnih koraka o statusu backupa.

Napomena:

Nakon što se napravi restore podataka na jedan od diskova, potrebno je u opcijama foldera omogućiti prikaz hidden i system datoteka, jer u protivnom isti neće biti vidljivi.

Prikaz hidden items:

Staviti kvačicu na Hidden items.
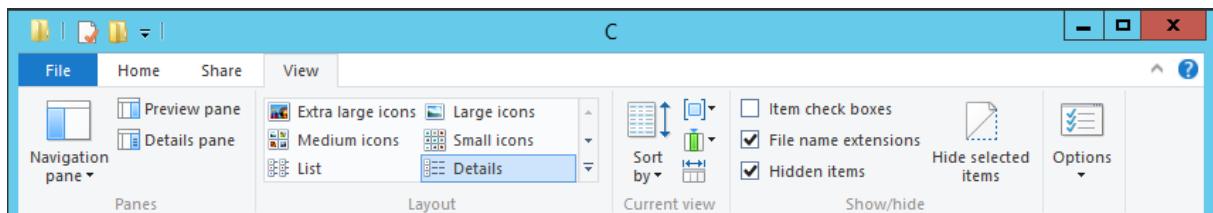
Prikaz system items:

Na desnoj strani ispod sličice Options kliknuti na strelicu, nakon toga se otvara pod meni te je potrebno odabrati „Change Folder and Search options".

Maknuti kvačicu s opcije „Hide protected operating system files (Recommended)"
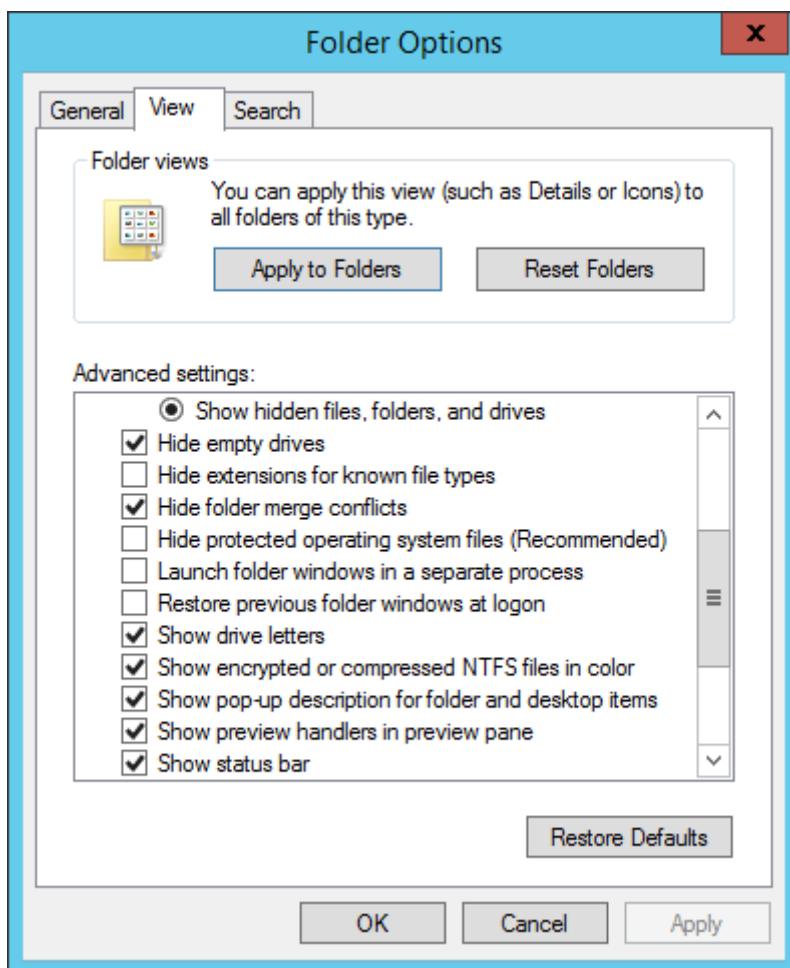
Za sve informacije slobodno se obratite putem e-maila sysbackup@carnet.hr